

K5 SERIES ADJUSTABLE PRESSURE SWITCH

Up to 600 BAR rated

K5 Adjustable Pressure switches provide an electrical signal once a set pressure value is reached. Adjustment is via a graduated knob which can be locked with a grub screw. Mechanical stops protect both the spring & micro-switch from over-pressurisation.


Article no.	Adjustable Pressure Range BAR	Max Pressure BAR
K51.1	0.2 - 2	12
K51.2	0.5 - 5	12
K51.3	1 - 10	15
K51.4	3 - 15	20
K53P	2 - 40	200
K54P	5 - 100	300
K55P	20 - 200	400
K57P	30 - 300	500
K59P	50 - 400	600
B6	CETOP 3	350
B10	CETOP 5	350

Screw driver adjustable on request


Technical Features

Body	Anodised Aluminium
Connection	1/4" BSP Female or CETOP 3/5
Mounting	ANY orientation
Temp. Range	-20 to +80°C
Frequency	120 Cycles/min
Accuracy	±1% of Set Pressure
Fixed Hysteresis	15% of full scale reading
Weight	0.35Kg
Electrical Connection	DIN 43650
Weatherproof	IP65
Max. Contact Load	AC 250v (5 A) DC 250v (0.25 A)

CETOP 3 MANIFOLD



CETOP 5 MANIFOLD

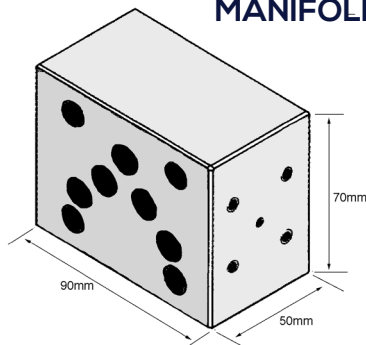


With just one manifold it is possible to connect the outlet pressure to P, A or B. Made in anodized aluminium they can be used for a maximum working pressure of 350 Bar. They are supplied complete with screws to fix the pressure switch, plugs to close the pressure ports not in use and o-rings.



K5 P Execution with graduate knob



Electrical connection



Dimensions

